


We separate the wheat from the chaff


Destoners JGD

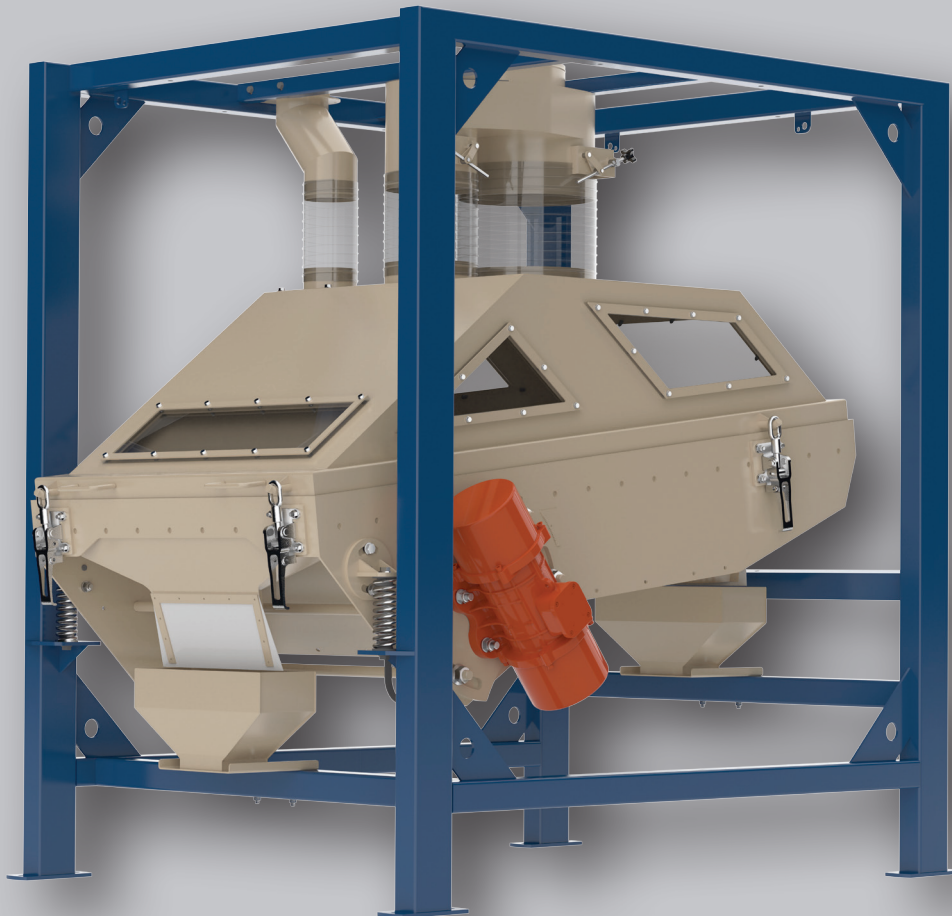

- Intended for destoning, sorting of material on the light and heavy fractions
- For use in grain mills, dehulling lines, flakes production and other food processing lines
- High efficiency, easy and accurate adjustment
- Low energy consumption
- Dust-free operation

JGD		03	05	08	12	
Capacity	t/h	1-2	2-6	6-12	8-16	
Sieve area	m ²	0,21	0,5	1,0	1,5	
Input power	kW	0,7	0,7	0,7	1,4	
Air consumption – exhaustion	m ³ /s	0,42	1,0	2,0	3,0	
Dimensions	Length	mm	1170	1640	1840	1850
	Width	mm	780	1020	1320	1660
	Height	mm	1290	1740	1740	2330
Weight	kg	200	380	465	640	

Functional diagram of the Destoner JGD

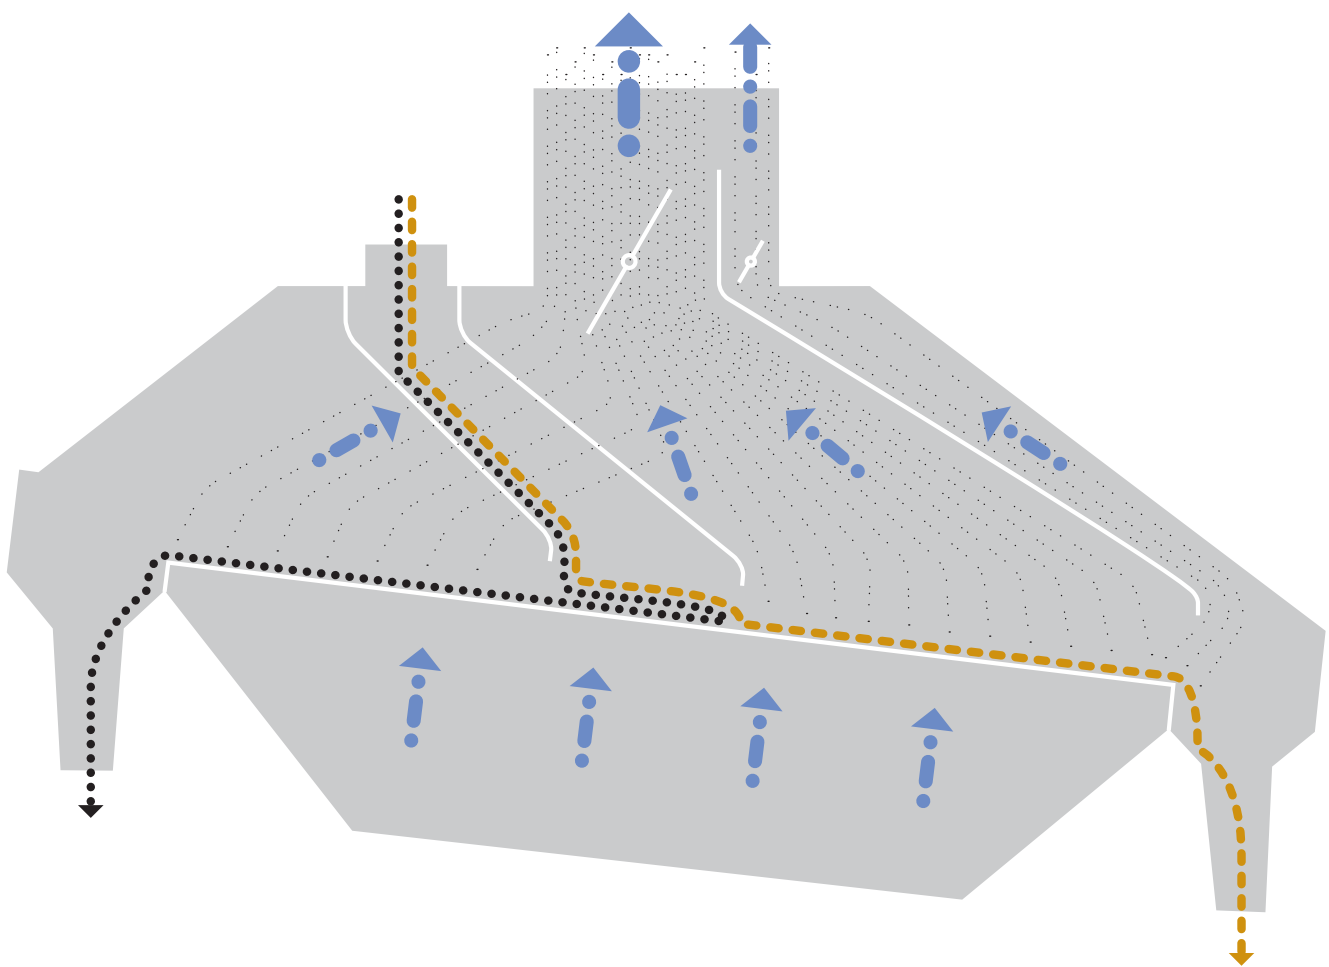

- - - - - ➔ Clean product
- ➔ Heavy impurities (stones)
- ➔ Air
- Light impurities